

## BELMONDO® Kingsize Cover

### prerequisites:




#### subsurface:

- hard/paved
- no holes
- no elevations
- maximum 2 % slope

#### mats:


even temperature:  
minimum 5° C to maximum 30° C  
(Store accordingly!)




**For wooden floors please consult us!**

### You will need this:

#### measuring:



or



#### marking:



or




#### cutting:



or



or




**! Do not install separation walls, posts etc. upon the cover!**  
(Stability is not guaranteed! Do not clamp the the cover!)




**i** To bind fluids (urine) a small amount of absorbent bedding is always required in the loosebox. We also recommend a minimal amount of bedding in the open stable.

#### **! Driving over**


BELMONDO® Kingsize Cover can be driven on with standard equipment such as farm yard loader or tractor with authorized pneumatic tyres at the recommended inflation pressure up to max. 4 bar. (Notice: drive with due care and steer in large radius!)



### Cut and position BELMONDO® Kingsize Cover

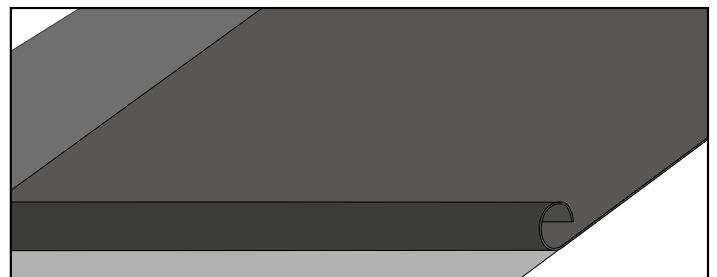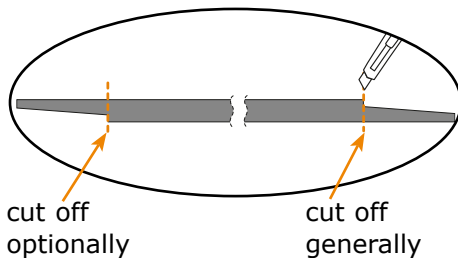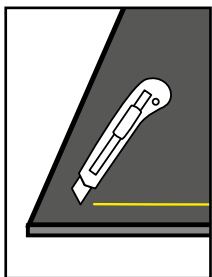


expansion joint for  
side boundary: 1-2 cm

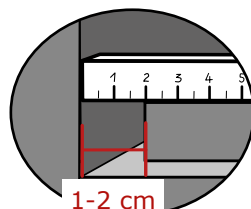

#### **i tips for cutting:**

- moisten or lubricate the blade lightly
- bend cover / pull it slightly apart
- possibly lay a board underneath - score - cut



**tip:** use pliers for pulling small pieces apart

**i** Appropriate installation may differ due to local conditions. Therefore the manufacturer is not liable for installation!